




# ARTM-8 Multi Channel Temperature Controller




## Functions ARTM-8

Functions	ARTM-8
Channels	8
Inputs	Thermal resistance: Pt100
Accuracy	0.5s
Alarm	2 groups normally open,Capacity AC250V/5A,DC30V/5A
Auxiliary Power Supply	ARTM-8
Auxiliary power supply	AC85~265V, DC 100~350V
Poewe consumption	≤2W
Communication	ARTM-8
Protocol	MODBUS-RTU
Rear port	RS485
Baud rate(bps)	1200,2400,4800,9600,19200
Environment	ARTM-8
Isolation	2kV/1min Ac effective value
Temperature	Operating: -10~+55 C, Storage: -25~+70 C
Humidity	≤95%, (No condensation)
Altitude	≤2000m


### Model Description

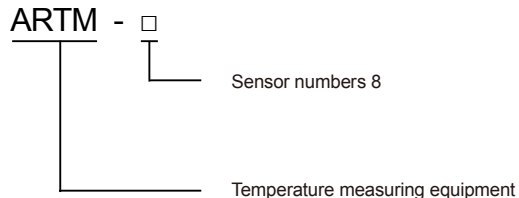

### Wiring

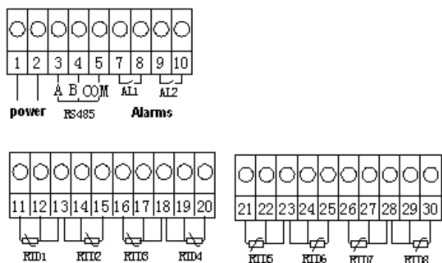

### Dimensions

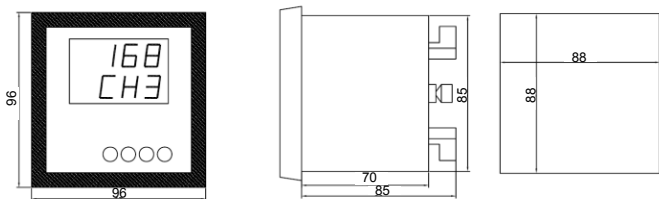

Dimensions

Cut-out Dimensions

### Operation Process

